

Very adaptive to a broad range of flotation needs where objects are to be floated close to the surface.

SUBSALVE USA Enclosed Flotation Bags' totally-enclosed "pillow" shape allows the bag to be used in any position – upright or flat, outside or inside of structures. With a multitude of rigging combinations, perfect for vessel salvage, automobile recovery and emergency Rotation systems for ships, aircraft, submersibles and ROVs.

Constructed of heavy-duty, ballistic-rated nylon fabric coated with urethane, this specially-coated fabric is:

- High-strength
- Very resistant to abrasion
- Not affected by most petro-chemicals
- UV resistant

The EFB design incorporates a heavy nylon lift harness built into the body of the lift bag, and has a safe working ratio of 6: 1.

All EFBs can be used with a single pick point with the shackle supplied on the bottom of the bag. EFBs can also be inverted to use the two stainless steel rings on the top of the bag with two pick points.


All EFBs are equipped with:

- 3/4" NPT inflation/deflation port
- Equipped with brass quick disconnect for inflation
- Pressure relief valves – set to release at 2.5 psi above ambient pressure
- Enough pressure relief valves are installed in each bag to allow expanding air to vent should a free ascent occur

SUBSALVE USA Enclosed Flotation Bags leave our manufacturing facility equipped with all necessary hardware and are ready for immediate use.

Each *SUBSALVE USA* Enclosed Flotation Bag is tested prior to shipping, and must pass rigorous U.S. Department of Defense standards.

Custom sizes and designs are available – inquire about our Custom Flotation Service

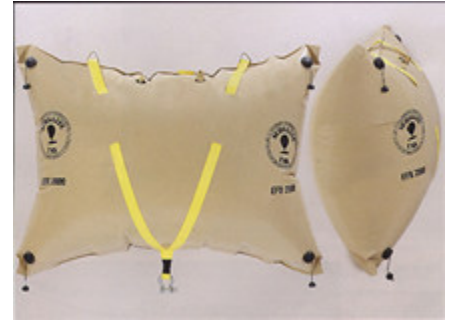

Enclosed Flotation Bag (2000 lb.) shown front and side




Ferro-cement sailboat salvage using Enclosed Flotation Bags.



Trawler salvage in shallow water using Enclosed Flotation Bags.

Model	Lift Capacity	Height	Length	Packaged Cubic Dimension	Weight	Attachment Points
EFB 6000	6,600 lbs 3,000 kgs	6' 4" 1.94 m	9' 4" 2.87 m	26" x 18" x 13" .67m x .46m x .33m	90 lbs 40.8 kgs	3 Top 1 Bottom
EFB 4000	4,400 lbs 2,000 kgs	5' 9" 1.77 m	6' 3" 1.92 m	22" x 15" x 13" .56m x .38m x .33m	70 lbs 31.7 kgs	2 Top 1 Bottom
EFB 2000	2,200 lbs 1,000 kgs	4' 7" 1.41 m	5' 0" 1.54 m	20" x 15" x 9.5" .51m x .38m x .24m	50 lbs 22.7 kgs	2 Top 1 Bottom
EFB 1000	1,100 lbs 500 kgs	3' 8" 1.13 m	4' 3" 1.31 m	18" x 13" x 10" .46m x .33m x .26m	32 lbs 14.5 kgs	2 Top 1 Bottom
EFB 500	550 lbs 250 kgs	2' 8" 0.82 m	4' 3" 1.31 m	17" x 12" x 8" .44m x .31m x .21m	20 lbs 9.1 kgs	2 Top 1 Bottom
EFB 200	220 lbs 100 kgs	2' 5" 0.74 m	3' 2" 0.97 m	15" x 11" x 7" .38m x .28m x .18m	12 lbs 5.4 kgs	1 Bottom

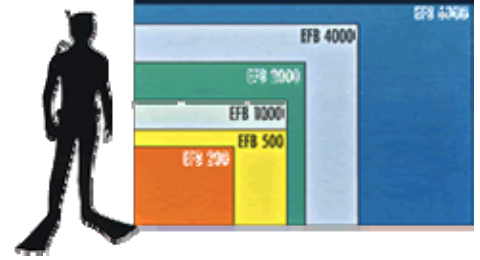

For more information, please contact:

Trim Systems Pte Ltd
74 Kian Teck Road
Singapore 628800

Tel: 65-62664566
Fax: 65-62665157
E-mail: trimly@singnet.com.sg