



## 26-2900 Series

- Balanced stem design eliminates the need to adjust bias over a wide range of operating pressures
- High flow capacity:  $C_V=2.0$
- Diaphragm sensed
- Low accumulation
- Mounts in any position
- Choice of stainless steel or brass construction


## 26-2900 Series High Flow/Sensitive

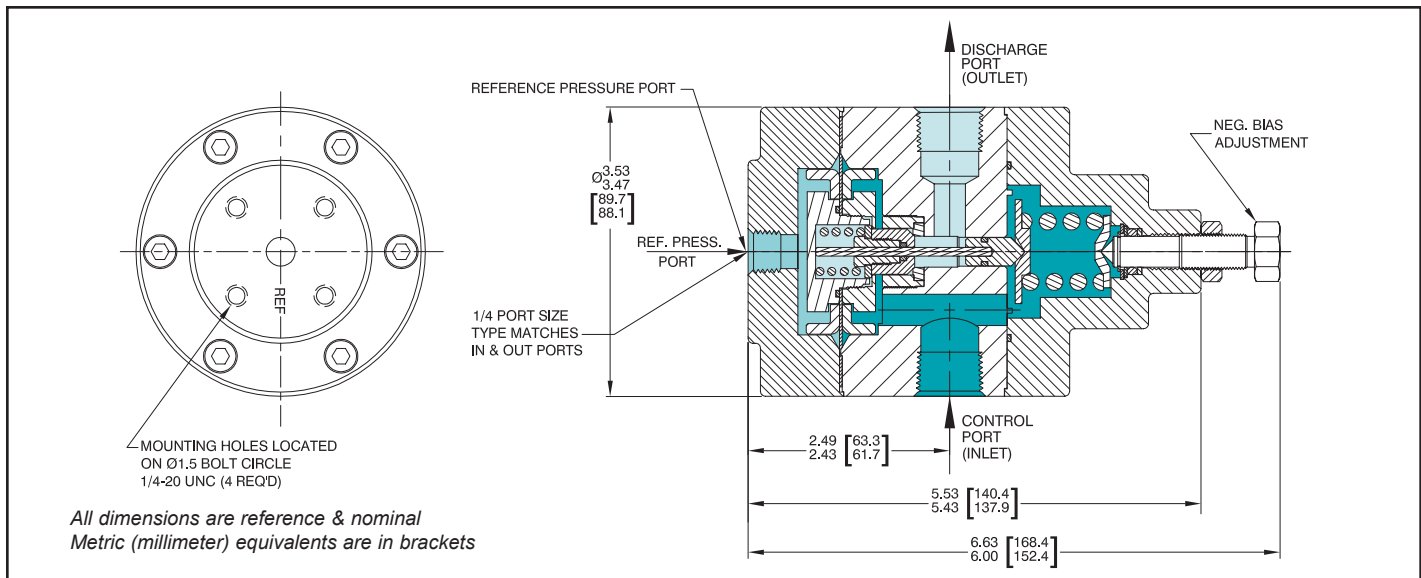

### Flow Chart

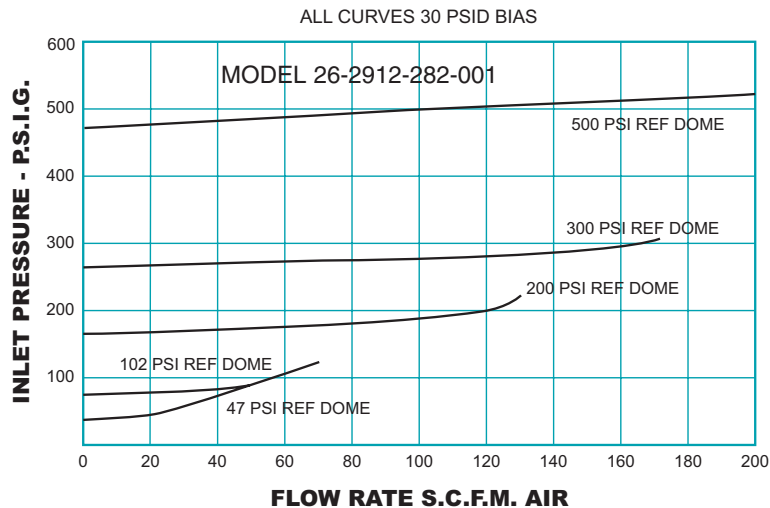

### Typical Installations

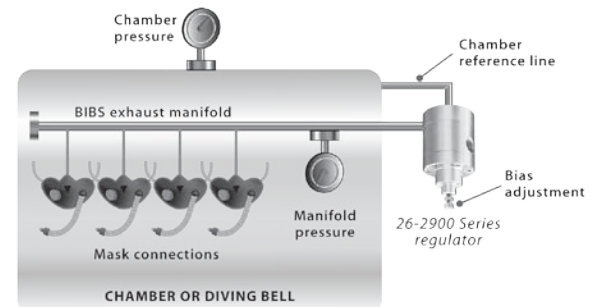

- Dumping exhaled breath out of a pressure chamber (BIBS)
- Constant bias applications such as offshore diving apparatus

### Part Number Selector

example part number:

**26-29 1 - 2 - 8 2 A**

| BASIC SERIES | BODY MATERIAL                                             | BIAS PRESSURE RANGE                                                                                                                              | INLET & OUTLET PORT TYPE                                                 | INLET & OUTLET PORT SIZE | BIAS MODE           | FLOW CAPACITY        |
|--------------|-----------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|--------------------------|---------------------|----------------------|
| <b>26-29</b> | <b>1</b> - Brass<br><b>2</b> - 303 Series Stainless Steel | <b>0</b> - Zero bias<br><b>1</b> - 0-15 PSIG<br><b>2</b> - 0-30 PSIG<br>Inlet pressures 0-500 PSIG<br>0-25 PSIG<br>Inlet pressures 500-1000 PSIG | <b>1</b> - SAE<br><b>2</b> - NPT<br><b>3</b> - MS33649<br><b>9</b> - BSP | <b>8</b> - 1/2"          | <b>2</b> - Negative | <b>A</b> - $C_v=2.0$ |

*Repair Kits & Accessories may be available for this product. Please contact Tescom for more information.*



**WARNING!** Do not attempt to select, install, use or maintain this product until you have read and fully understood the *Tescom Safety, Installation & Operation Precautions*.

The contents of this publication are presented for informational purposes only, and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, expressed or implied, regarding the products or services described herein or their use or applicability. We reserve the right to modify or improve the designs or specifications of such product at any time without notice.

**For information contact:**

**TESCOM**

**TESCOM Industrial Controls**

Tel: 800-447-1250 • 763-241-3238

Fax: 763-241-3224 • email: ic@tescom.com

12616 Industrial Boulevard • Elk River, MN 55330 USA

©Tescom Corporation, 2006; All Rights Reserved.

Tescom is a business unit of the Regulator Division.

Trademarks are property of divisions of Emerson Process Management.

Form No. 1387 Rev. 9/06 Printed 9/06 5M Printed in the U.S.A.

**EMERSON**  
Process Management